



W O O D S T Y L E

my favourite room



8" x 48" / 200x1200mm / 20x120cm



ATMOSFERE NATURALI























BARMA BEIGE





STRIP

TILES

DIGITAL

GLAZED

VITRIFIED














BARMA BROWN

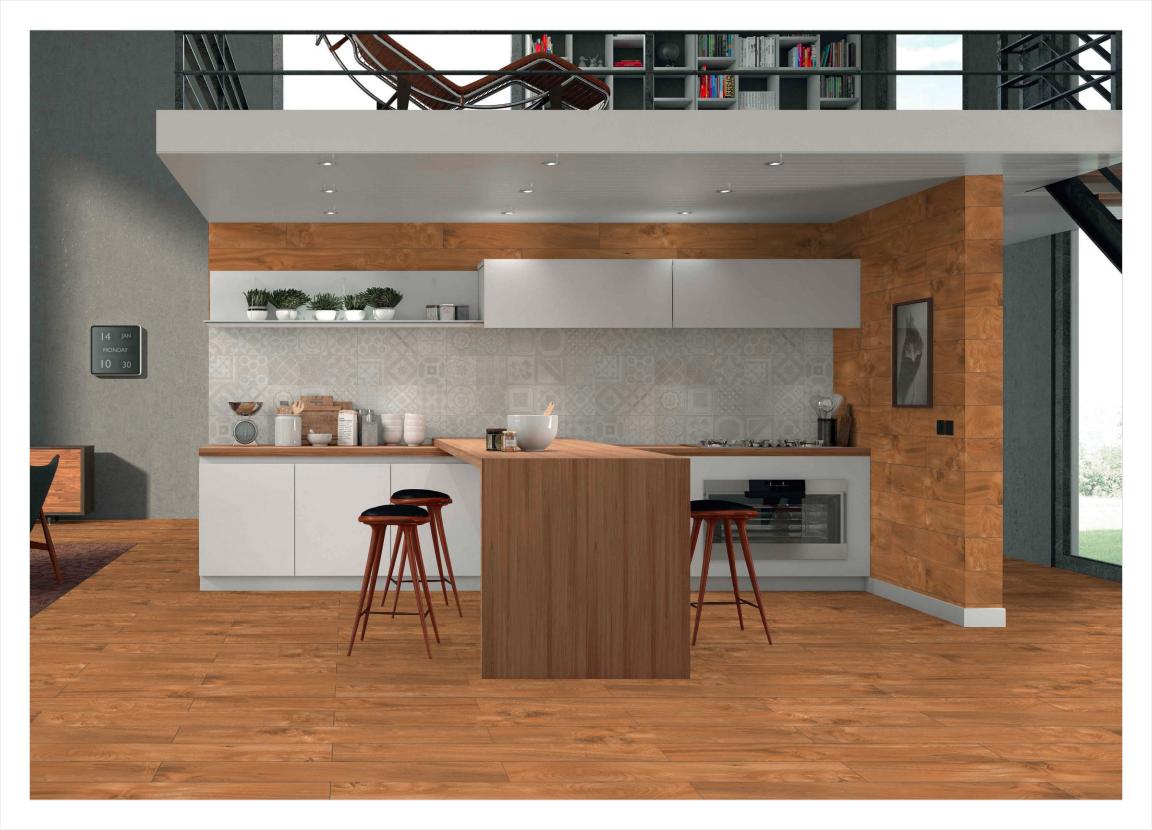



STRIP

TILES

DIGITAL

GLAZED

VITRIFIED
















BARMA CAFÉ

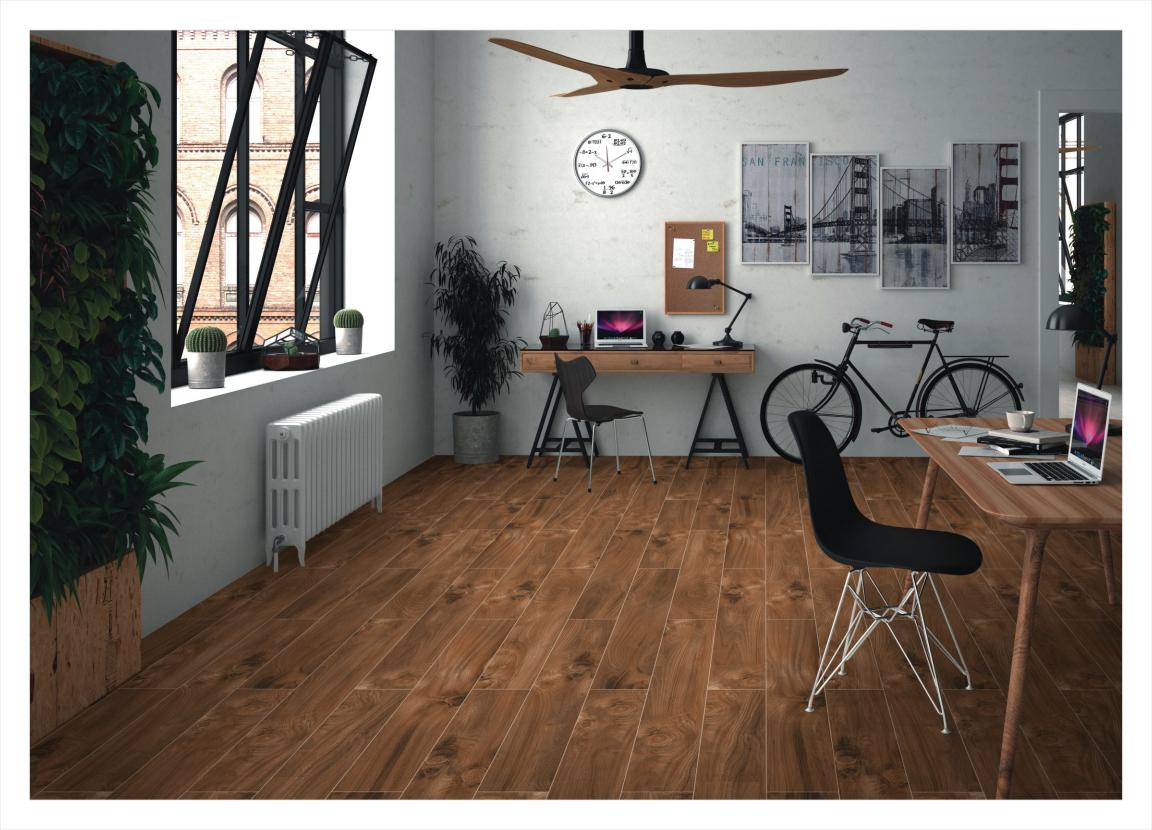






















STRIP

TILES

DIGITAL

GLAZED

















STRIP

TILES

DIGITAL

GLAZED

VITRIFIED
















BARMA TEAH

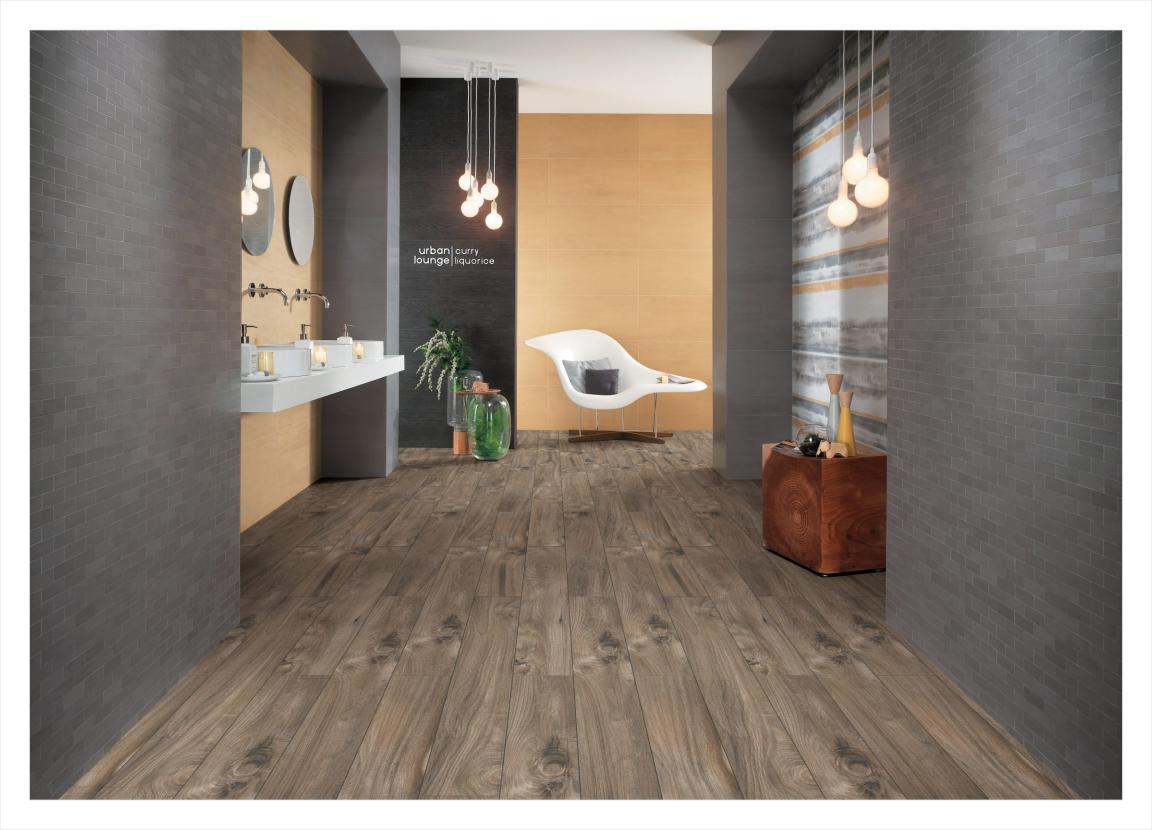
















































JACH BALENO

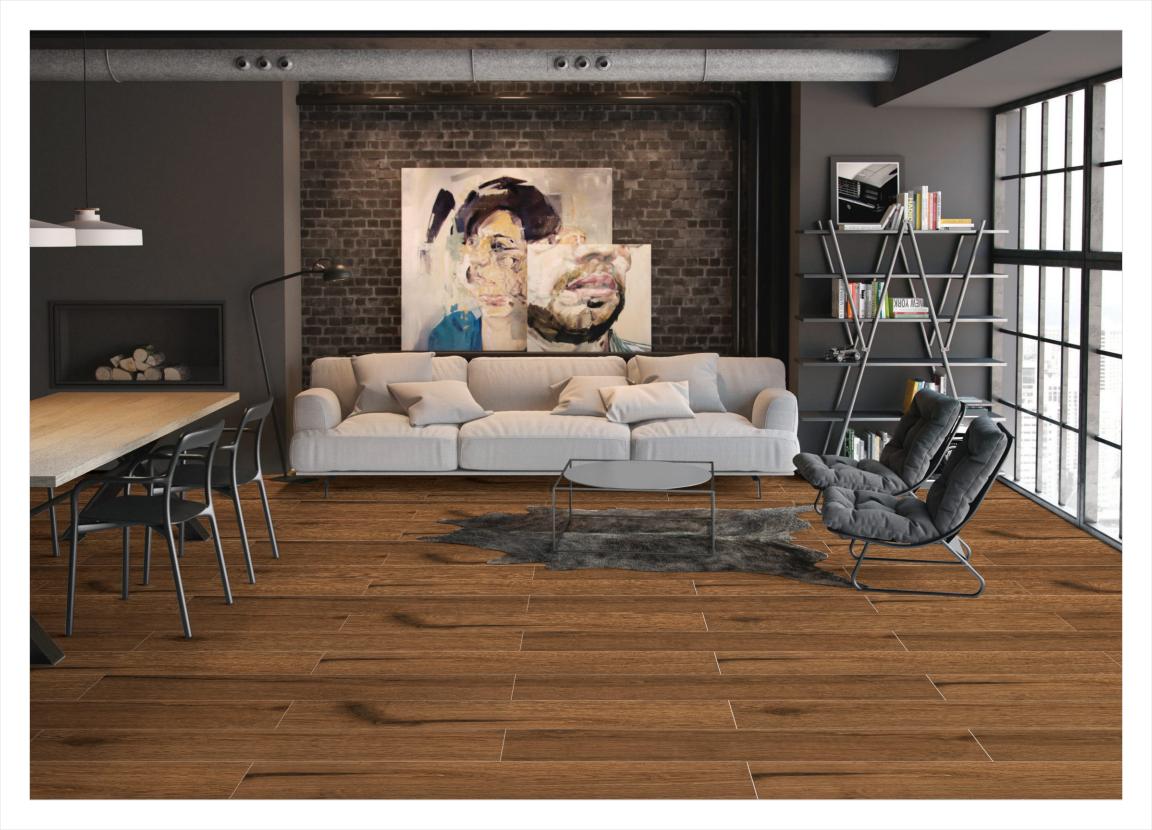



STRIP

TILES

DIGITAL

GLAZED















STRIP

TILES


DIGITAL

GLAZED







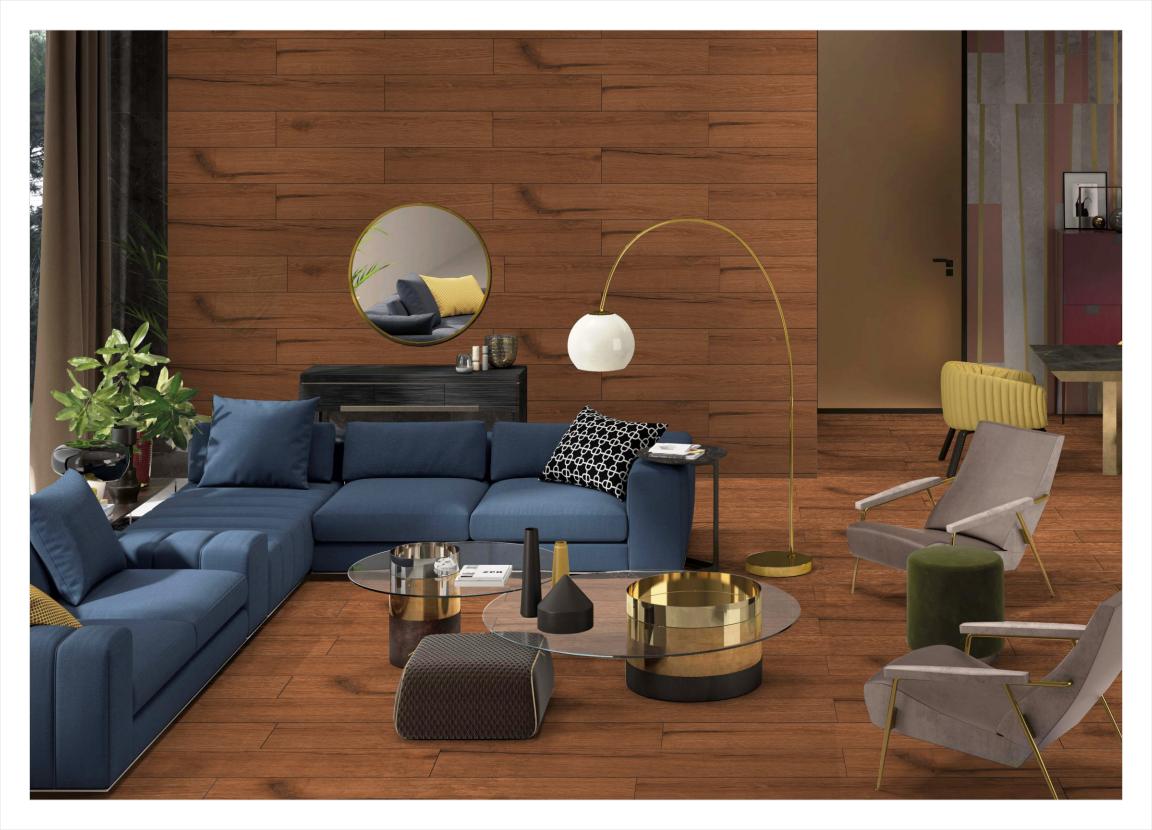



STRIP

TILES

DIGITAL


GLAZED



























JACH SLATE

















MOUNTAIN BROWN





STRIP

TILES

DIGITAL

GLAZED

VITRIFIED











MOUNTAIN NATURAL
















MYGRA DARH

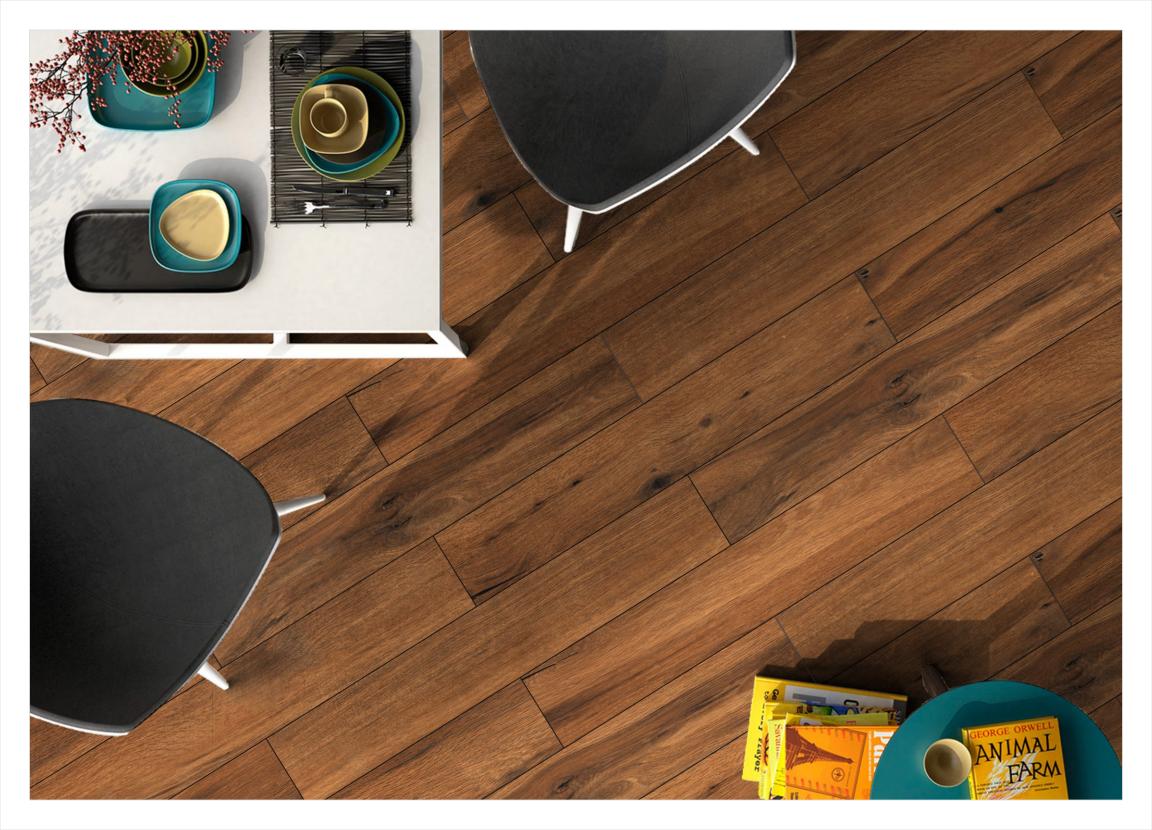



STRIP

TILES

DIGITAL


GLAZED

VITRIFIED





NARZO BEIGE

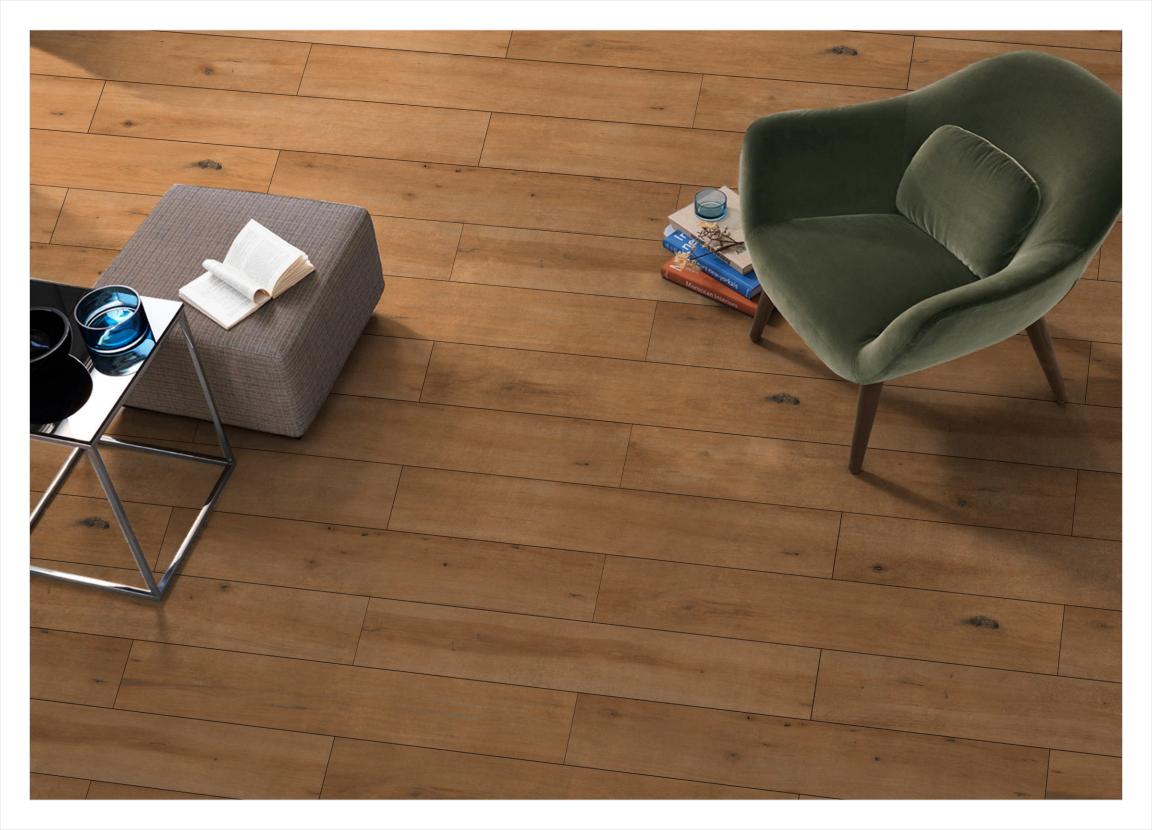


















NARZO BROWN

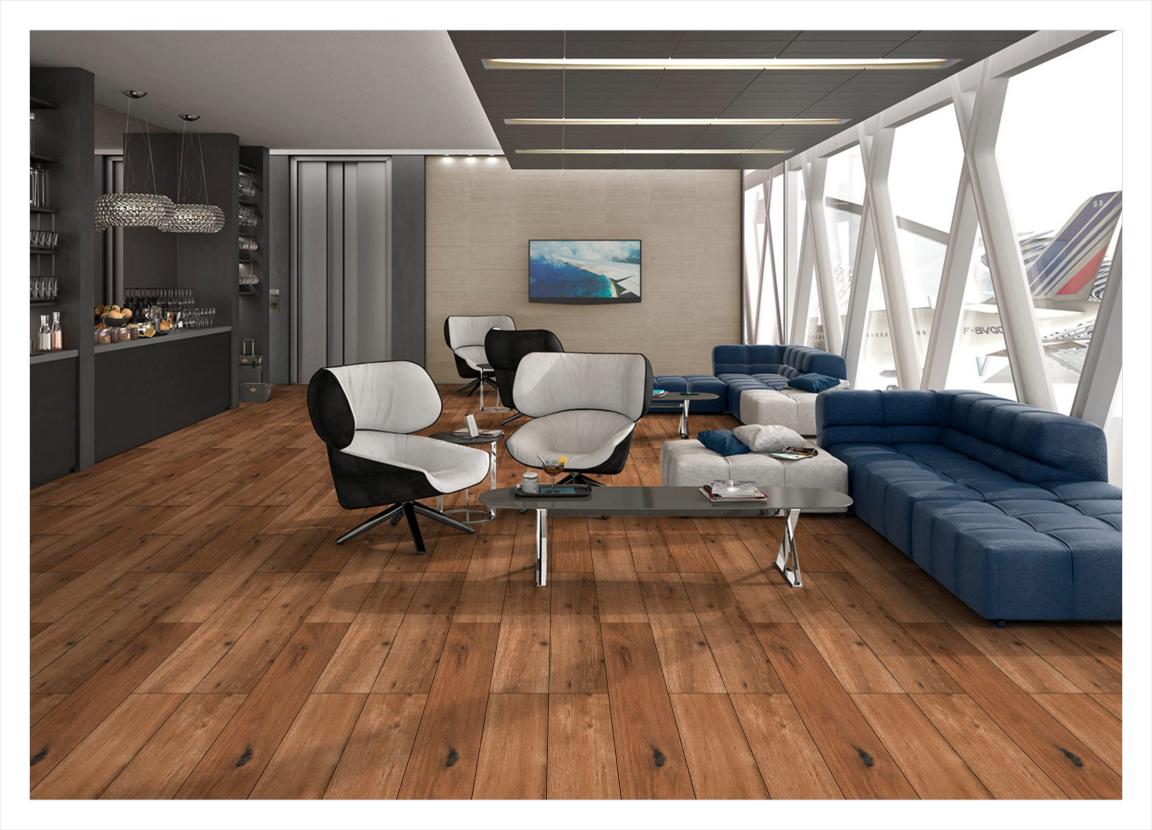



STRIP

TILES

DIGITAL

GLAZED

VITRIFIED







——— NARZO CREMA

















NARZO IVORY



















NOICY BROWN





STRIP

TILES

DIGITAL

GLAZED



















STRIP

TILES

DIGITAL

GLAZED

VITRIFIED














NOICY LIGHT

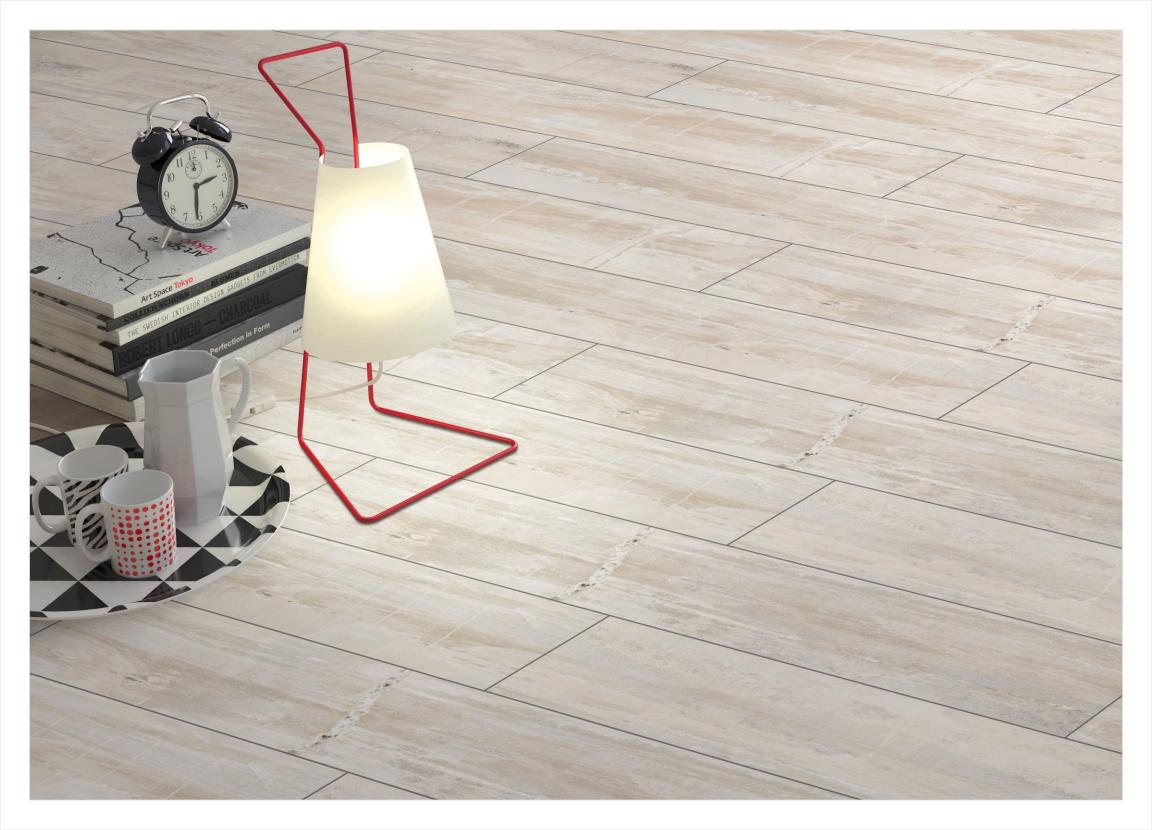

















RANGER BEIGE














RANGER LIGHT

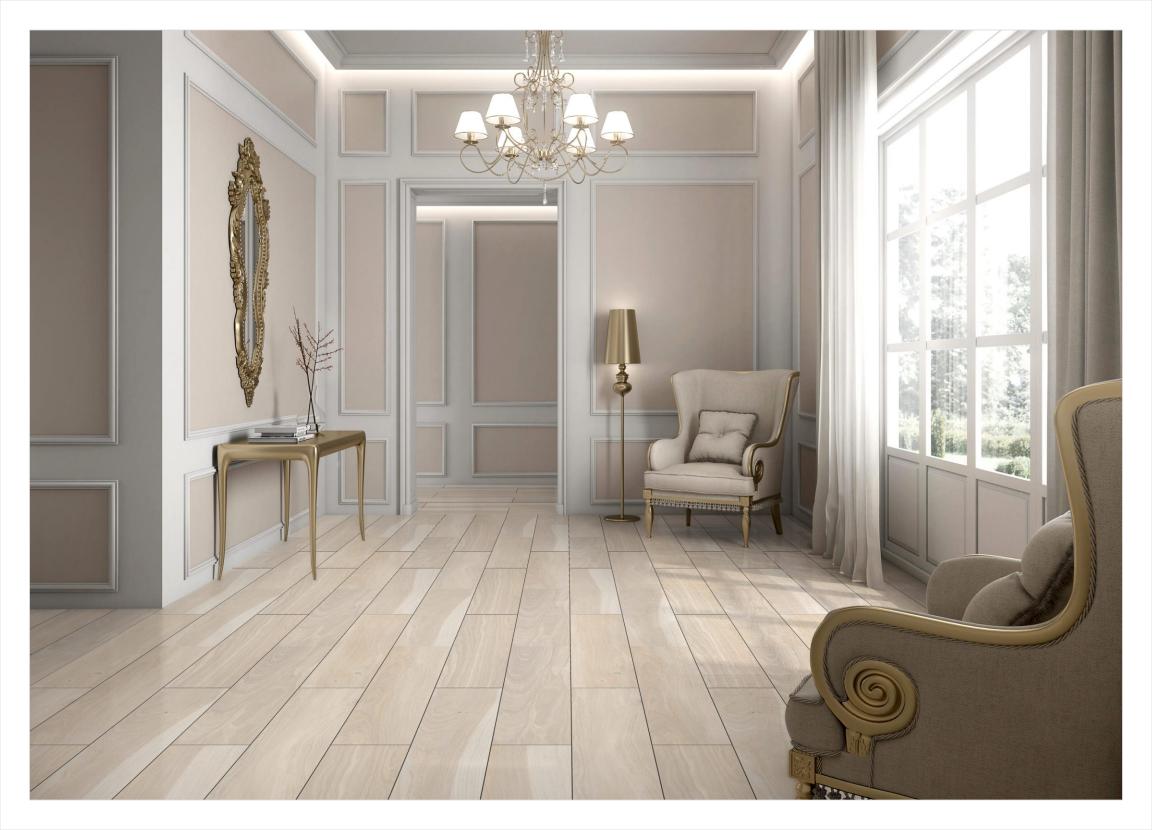















RANGER MIST





STRIP

TILES

DIGITAL

GLAZED


VITRIFIED







RANGER NATURAL

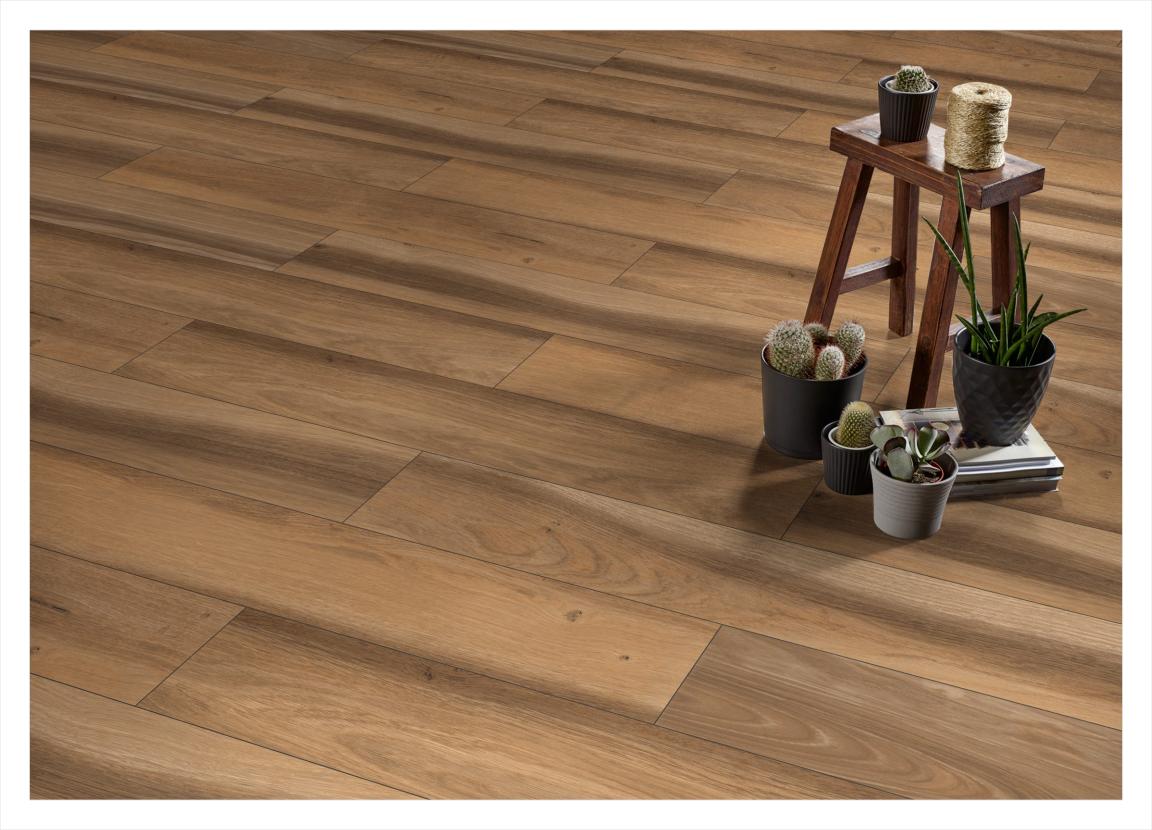



STRIP

TILES


DIGITAL

GLAZED







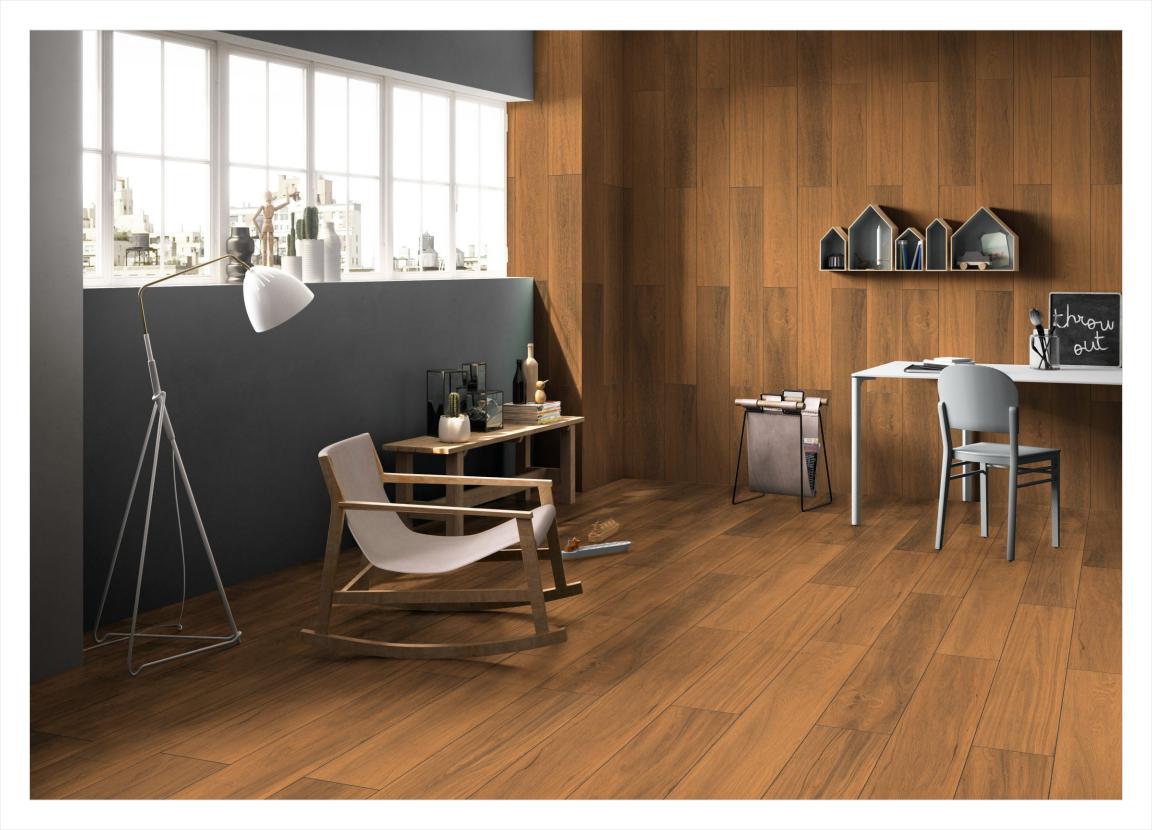



STRIP

TILES

DIGITAL

GLAZED




























TUSCON MARVEL

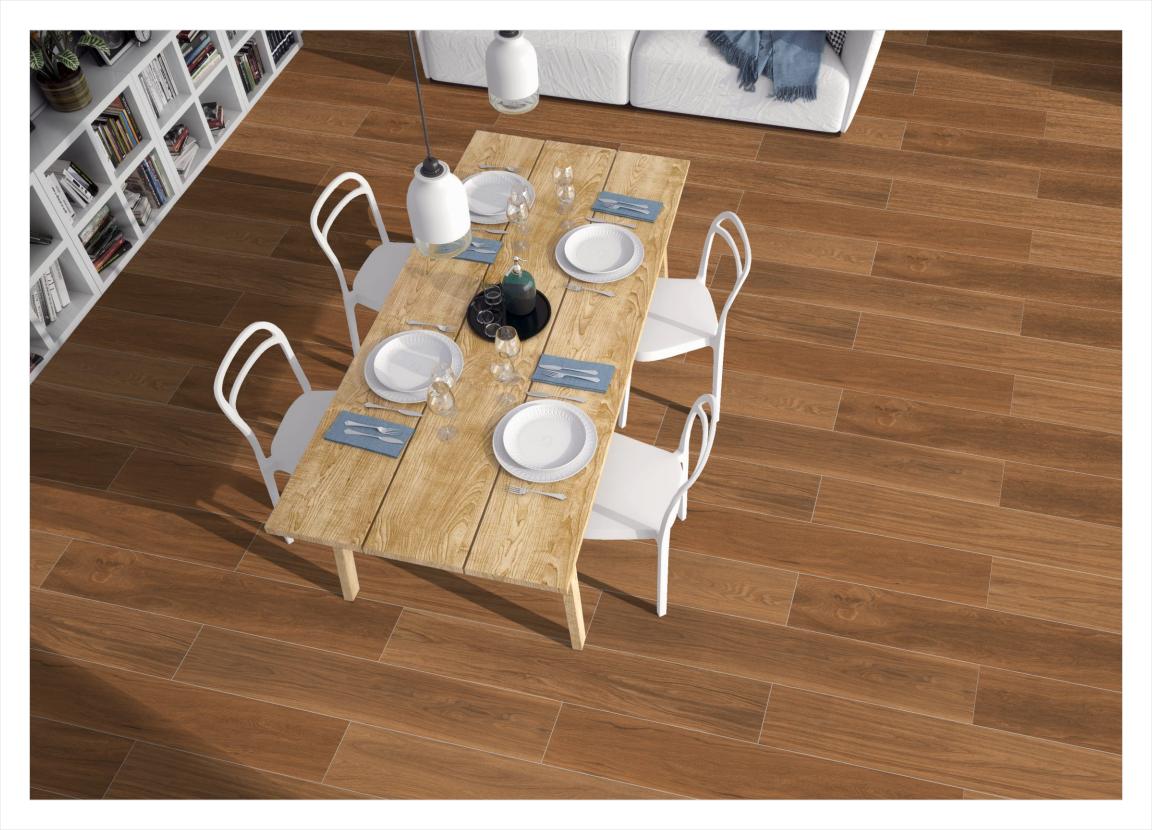



STRIP

TILES

DIGITAL


GLAZED











TECHNICAL SPECIFICATION

Sr No.	CHARACTERISTICS	ISO TEST METHODS	VITRIFIED TILES IS 15622 : 2006 GROUP Bla	VITRIFIED TILES REQUIREMENT AS PER ISO 13006 Bla / EN176 Bla	VETO VALUE		
А	Dimension & Surface Quality						
1	Deviation in Length & Width	ISO 10545-2	+/- 0.1 %	+/- 0.6 %	+/- 0.1 %		
2	Deviation in Thickness	ISO 10545-2	+/- 4.0 %	+/- 5.0 %	+/- 3.5 %		
3	Straightness of sides	ISO 10545-2	+/- 0.1 %	+/- 0.5 %	+/- 0.08 %		
4	Rectangularity	ISO 10545-2	+/- 0.1 %	+/- 0.6 %	+/- 0.1 %		
5	Surface Flatness	ISO 10545-2	+/- 0.2 %	+/- 0.5 %	+/- 0.2 %		
6	Color Difference	ISO 10545-2	Unaltered	Unaltered	No Change		
В	Physical Properties						
1	Water Absorption	ISO 10545-3	≤ 0.08%	≤ 0.5%	0.05%		
2	Flexural Strength (MOR)	ISO 10545-4	≥ 44 N mm²	≥ 35 N mm²	44		
3	Mohs Hardness	EN 101	≥ 6	≥ 6	7		
4	Flexural Breaking Strength	ISO 10545-4	> 1500 N	> 1300 N	1900 N		
5	Bulk Density (GM/CC)	DIN 51082	> 2.2 gm/cc	> 2 gm/cc	2.35 gm/cc		
6	Slip Resistance Coefficient of Friction	ISO 10545-17	≥ 0.4	≥ 0.4	≥ 0.6		
С	C Chemical Properties						
1	Staining Resistance	ISO 10545-14	Resistant	Resistant	Resistant		
2	Household Chemicals	ISO 10545-13	No Damage	No Damage	No Damage		
D	Thermal Properties						
1	Thermal Shock Resistance	ISO 10545-9	No Damage	No Damage	Passed		
2	Thermal Expansion	ISO 10545-8	9x10 ⁻⁶ - k ⁻¹ Max.	9x10 ⁻⁶ Max.	Passed		
3	Moisture Expansion	ISO 10545-10	Nil	Nil	Passed		

PACKING DETAILS

SERIES	TILE SIZE	NO. OF TILES / BOX	WEIGHT / BOX (approx)	COVERAGE AREA / BOX (approx)	COVERAGE AREA / BOX (approx)
DIGITAL GVT	200x1200mm	5 Pcs.	27.00 Kgs.	1.20 Sq.Mtr.	12.92 Sq.Ft.

Note

Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.

VETO'S WOOD

VETO CERAMIC PVT. LTD.

8-A, National Highway, Opp.

Dariyalal Resort, At : Jambudiya,

Morbi - 363642 (Gujarat) India.

Cell: +91 99790 70938 / +91 98256 15109

 $\hbox{E-mail:} \textbf{veto.ceramic@gmail.com}$